
HQ2S





Quartz





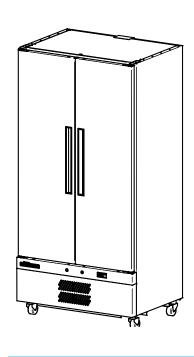

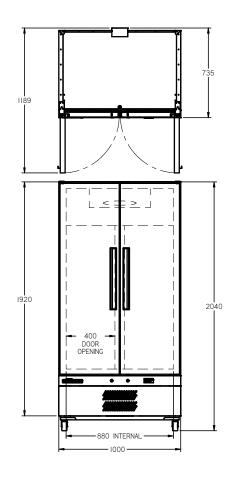

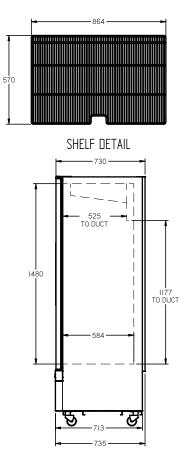

SPECFICATIONS	
CAPACITY LITRES	670
TEMPERATURE	1°C / 4 °C
DIMENSIONS - W X D X H (ON 120 MM H CASTORS) MM	1000 W x 735 D x 2040 H
WEIGHT UNPACKED (KG)	200
STANDARD INCLUSIONS ***	
DOOR TYPE	S (Solid Door)
FINISH (INTERIOR AND EXTERIOR EXCLUDING REAR AND UNDER)	W (White), B (Black), S (Stainless Steel)
SHELVES/DOOR (ADJUSTABLE STRIPS AND CLIPS)	4
GAS TYPE	
REFRIGERANT	R134a

ELECTRICAL	
POWER SUPPLY	10 amp
POWER CABLE LENGTH (METRES)	2
RUNNING AMPS	3.3
PERFORMANCE	
KWH/24HR READING	TBC
TEST STANDARD	EN 16825 (Professional)
TEST CONDITIONS	4 M1
AMBIENT RATING	43°C
REFRIGERATION WATTAGES FOR OPTIONAL	
REMOTE UNITS	
FRIDGE MODELS - SOLID DOORS (R404A)	600 @ -5°C SST

^{***} For **OPTIONS** refer to the current Williams Price Guide